



## Variable Gain Low Noise Current Amplifier

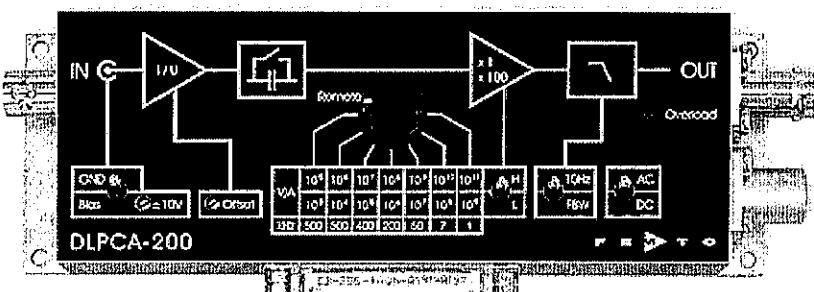

Features	<ul style="list-style-type: none"> <li>Transimpedance (Gain) Switchable from <math>1 \times 10^3</math> to <math>1 \times 10^{11}</math> V/A</li> <li>Bandwidth DC / 1 Hz ... 500 kHz</li> <li>Bandwidth Switchable to DC ... 10 Hz for Low Noise DC Measurements</li> <li>Bandwidth Independent of Detector Capacitance (up to 1 nF)</li> <li>Adjustable Bias Voltage</li> <li>Protection Against <math>\pm 3</math> kV Transients</li> <li>Local and Remote Control</li> </ul>
Applications	<ul style="list-style-type: none"> <li>Photodiode and Photomultiplier Amplifier</li> <li>Scanning Tunneling Microscopy (STM)</li> <li>Spectroscopy</li> <li>Beam Monitoring for Particle Accelerators / Synchrotrons</li> <li>Ionisation Detectors</li> <li>Preamplifier for Lock-Ins, A/D-Converters, etc.</li> </ul>

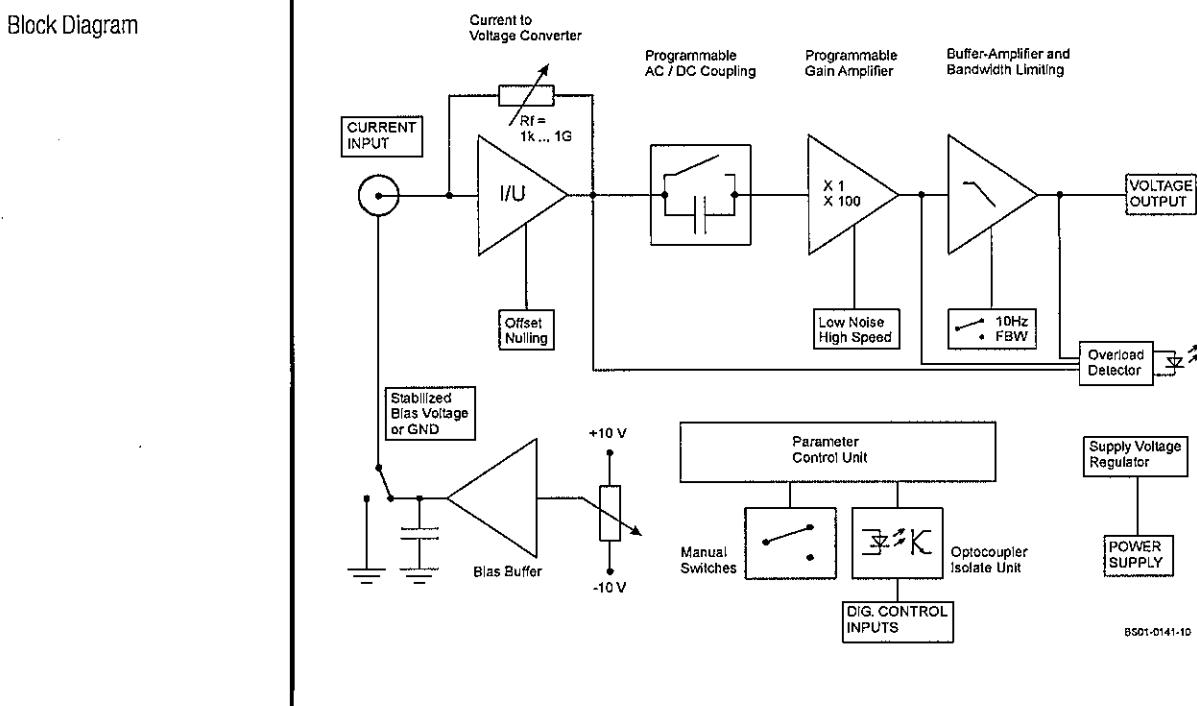


SOPHISTICATED TOOLS FOR SIGNAL RECOVERY






## Variable Gain Low Noise Current Amplifier

Indicator LED	Function	overload
Digital Control	Control Input Voltage Range Control Input Current Overload Output	LOW bit: - 0.8 ... + 1.2 V, HIGH bit: 2.3 ... + 12 V 0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V non active: 0 V, max. -1 mA, active: 5.1 V, max. 7 mA
Ext. Offset Control	Control Voltage Range Offset Control Input Impedance	± 10 V 20 kΩ
Power Supply	Supply Voltage Supply Current Stabilized Power Supply Output	± 15 V + 120 / - 80 mA typ. (depends on operating conditions, recommended power supply capability min. ± 200 mA) ± 12 V, max. ± 150 mA, + 5V, max. 50 mA
Case	Weight Material	320 g (0.74 lb) AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature Operating Temperature	-40 ... +100 °C 0 ... +60 °C
Absolute Maximum Ratings	Signal Input Voltage Transient Input Voltage Control Input Voltage Power Supply Voltage	-16 V / + 12 V ± 3 kV (out of 200 pF source) - 5 V / + 16 V ± 22 V
Connectors	Input Output Detector Bias Output Power Supply	BNC, isolated BNC shield of input BNC LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND
	Control Port	 Sub-D 25-pin, female, qual. class 2 Pin 1: + 12 V (stabilized power supply output) Pin 2: - 12 V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: + 5 V (stabilized power supply output) Pin 5: digital output; overload Pin 6: signal output (connected to BNC) Pin 7: NC Pin 8: input offset control voltage Pin 9: DGND (ground for digital control pins 10 - 14) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: high speed / low noise Pin 15 - 25: NC


## Variable Gain Low Noise Current Amplifier

Remote Control Operation	General	Remote control input bits are opto-isolated and connected by logical OR function to local switch settings. For remote control set the corresponding local switches to "Remote", "AC" and "H" (High Speed) and select the wanted setting via a bit code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled AC/DC setting, is also possible.				
	Switch settings "FBW / 10 Hz" and "Bias / GND" are not remote controllable.					
Gain Setting	Low Noise Gain (V/A)	Pin 14=HIGH	High Speed Gain (V/A)	Pin 14=LOW	Pin 12 MSB	Pin 11
	Pin 10 LSB					
		$10^3$	$10^5$	LOW	LOW	LOW
		$10^4$	$10^6$	LOW	LOW	HIGH
		$10^5$	$10^7$	LOW	HIGH	LOW
		$10^6$	$10^8$	LOW	HIGH	HIGH
		$10^7$	$10^9$	HIGH	LOW	LOW
		$10^8$	$10^{10}$	HIGH	LOW	HIGH
		$10^9$	$10^{11}$	HIGH	HIGH	LOW
AC/DC Setting		Coupling	Pin 13			
		AC	LOW			
		DC	HIGH			

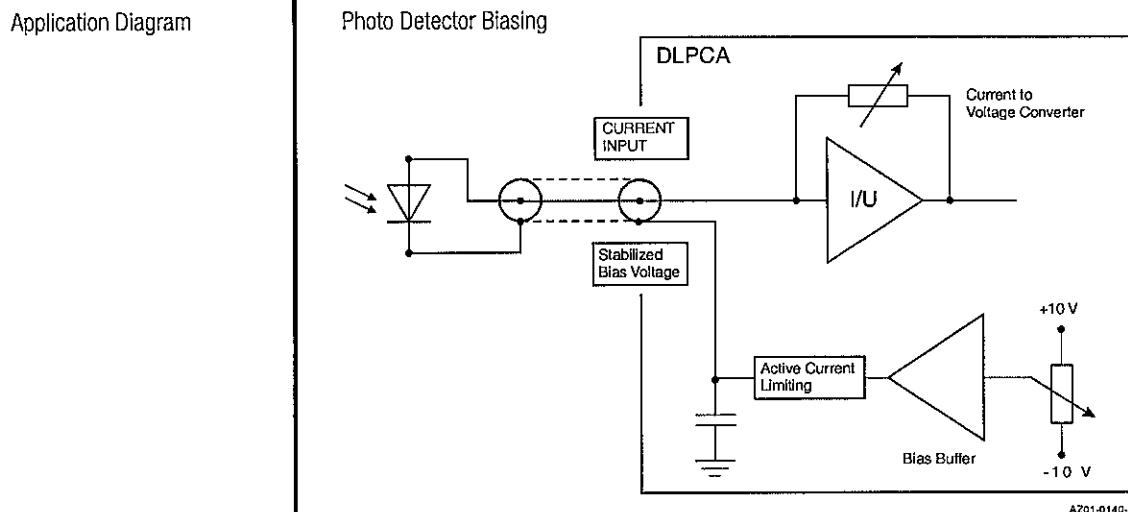

## Variable Gain Low Noise Current Amplifier

Dimensions

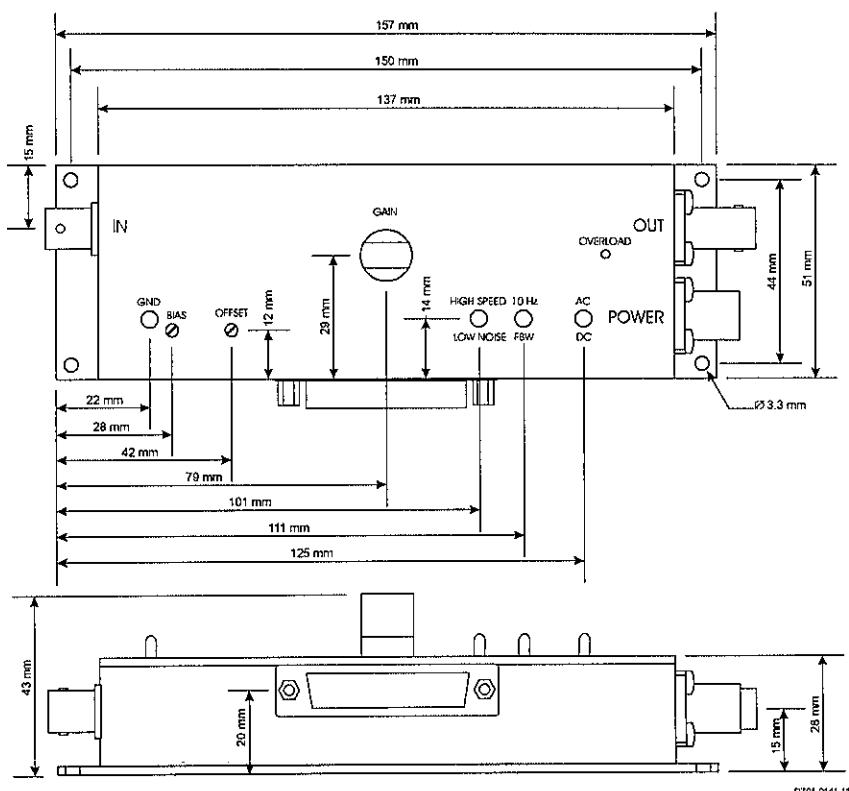

FEMTO Messtechnik GmbH  
Paul-Lincke-Ufer 34  
D-10999 Berlin • Germany  
Tel.: +49 (0)30 – 4 46 93 86  
Fax: +49 (0)30 – 4 46 93 88  
e-mail: info@femto.de  
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.  
© by FEMTO Messtechnik GmbH  
Printed in Germany