

- In the case of using as a DC power supply for other equipment


The output connectors are 6P metal connectors. Be sure to confirm pin assignment of the connectors and connect properly. Use RM12BP-6P (HIROSE) as an output plug.

④ OUTPUT

Output 1 and 2 are connected in parallel inside the case. The pin assignment is shown as follows:

Pin number	connect to
2	Chassis
4	-20V
5	+20V
6	0V

The maximum output current is 150mA in total.

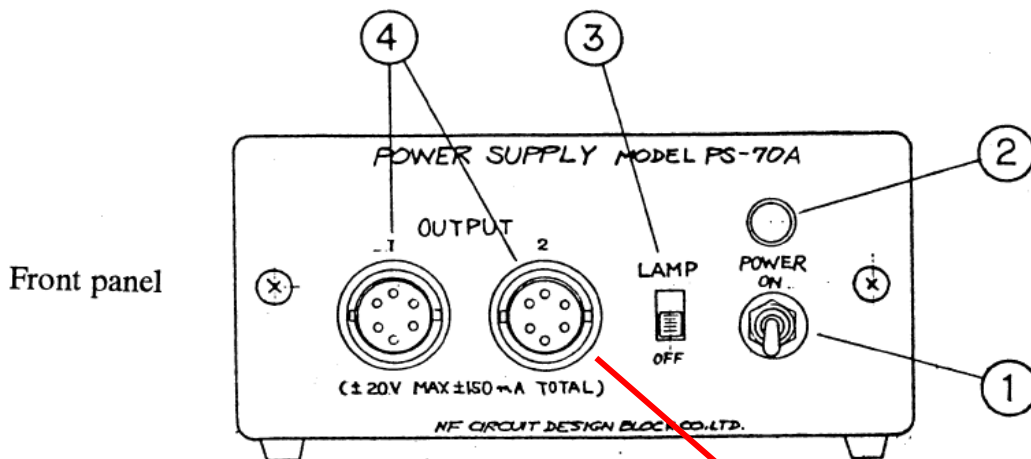

RM Series contact arrangement

Shell size						
12						
Contact arrangement number	2	3	4	5	6	7
Withstanding voltage	AC1800V for a minute	AC1500V for a minute	AC1500V for a minute	AC1000V for a minute	AC1000V for a minute	AC1000V for a minute
Current rating	5A	5A	5A	5A	5A	5A
Insulation resistance	1000MΩ or more	1000MΩ or more	1000MΩ or more	1000MΩ or more	1000MΩ or more	1000MΩ or more
Contact resistance	4mΩ or less	4mΩ or less	4mΩ or less	4mΩ or less	4mΩ or less	4mΩ or less
Inside diameter of solder pot	φ1.1	φ1.1	φ1.1	φ1.1	φ1.1	φ1.1